

## Gantan Spring Roof-850<sup>®</sup> PAT

CONTACT :  
 GANTAN BEAUTY INDUSTRY CO., LTD.  
 International Business Department  
 E-mail : overseas@gantan.co.jp  
 Phone : +81-466-43-2187 / Fax : +81-466-45-3037  
 URL : http://www.gantan.co.jp/english/index.html


Japan's top manufacturer of lateral roofing ※1



Junior high school



### ■ Features of the spring-back seam

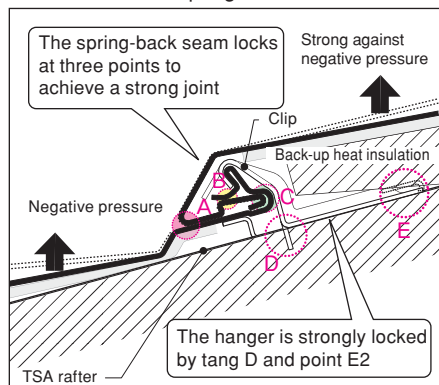

### ■ Performance

Wind pressure resistance:  
 8500Pa [8.5kN/m<sup>2</sup>]


\* Value tested by the Japan Testing Center for Construction Materials (steel plate thickness 0.4mm, rafter spacing 490mm, standard hanger specification)

Thermal insulation performance:  
 (heat transmission coefficient)  
 0.259W/(m<sup>2</sup>·K) [0.222kcal/(m<sup>2</sup> h°C)]


\* Gantan Yuko System, steel frame specification, mesh specification

### ■ Profile

Unit: mm



### ■ Details (Gantan yuko system)

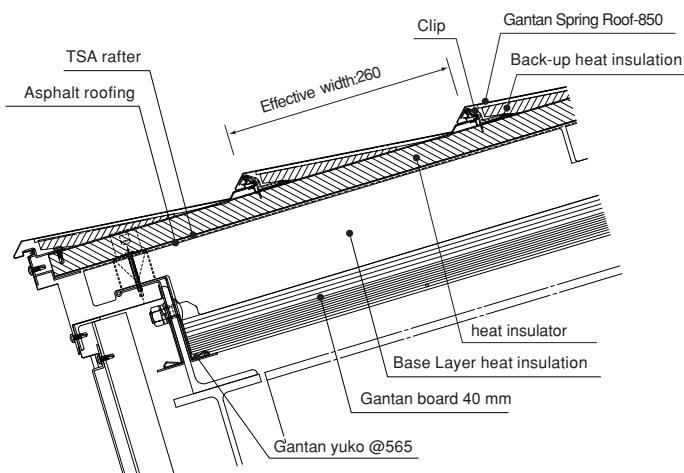

### ■ Standard Materials Thickness

Material	Thickness
Painted aluminum, fluoro-resin coated aluminum	0.7mm
Copper and patinaed copper	0.4mm
Painted stainless steel, fluoro-resin coated stainless steel	0.45mm
Fluoro-resin galvalume steel	0.45mm
Painted galvalume steel, Painted steel	0.4mm

### ■ Specifications

- Effective width:260mm
- Effective length:3850 mm (3640 mm for copper sheet)
- For slopes of 25/100 or steeper