

Gantan Seppan G-160

PAT.P

CONTACT:
GANTAN BEAUTY INDUSTRY CO.,LTD.
International Business Department
E-mail : kaigai@gantan.co.jp
Phone : +81-466-43-2187 / +81-466-45-3037
URL : <https://www.gantan.co.jp/en/home/>




■ Construction process

Tight frame construction



Fitting into the tight frame




Seam clamping




Distribution center

■ Profile

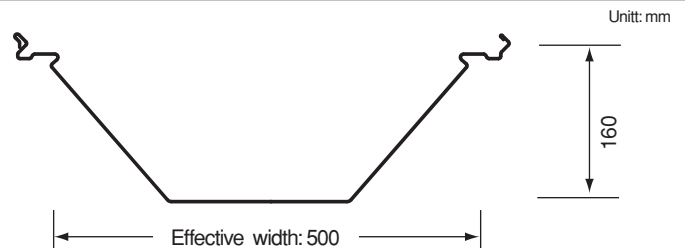

■ Details (Gantan yuko system)

(Single specification)

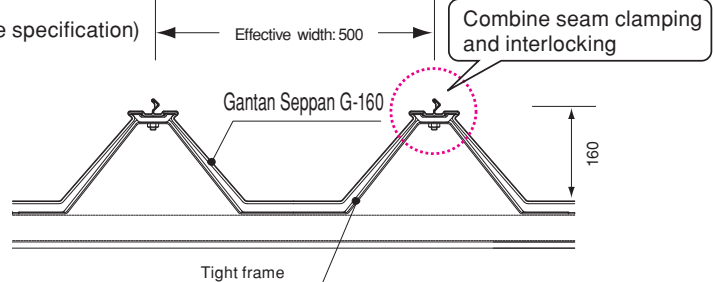

■ Standard Materials Thickness

Material	Thickness
Painted galvalume steel, Fluoro-resin galvalume steel	0.8, 1.0mm

■ Specifications

- Effective width : 500mm
- Effective length : 11m or longer made on site
- Slope : 3/100 or steeper

* Ask us about radius of curvature, regions of low temperatures or snow accumulation, etc.

● Sectional performance

Sheet thickness (mm)	Positive pressure		Negative pressure	
	Second moment of the section I_x (cm^4/m)	Section modulus Z_x (cm^3/m)	Second moment of the section I_x (cm^4/m)	Section modulus Z_x (cm^3/m)
0.8	355.1	35.5	257.4	25.7
1.0	443.9	44.3	321.7	32.1

